

# Silver-Glide® HD

Stair Lift

## Unit Dimensional Drawing

### SPECIFICATIONS

**Rated Load:** 375 pounds (170kg)

**Speed:** 18 fpm (.09 ms)

**Travel:** 20' max. (6.1 m)

**Power Supply:** 115 VAC, 60 Hz,  
3-wire grounded outlet

**Control Voltage:** 115 VAC

**Incline Limits:** 25° to 45°

**U.L. and c/U.L. listed**

### STANDARD EQUIPMENT

**Drive System:** 1/8" steel cable on winding drum

**Motor:** .57 hp, 120 VDC

**Brake:** Self-locking worm gear

**Track:** 8 3/4" (222mm) extruded aluminum

**Track Finish:** Natural aluminum color

**Track Length:** 16' stock or custom cut

**Unit Finish:** Ivory white powder coat

**Upholstery:** Misty gray vinyl

**Seat:** 60°/90° swivel at top and bottom landings,  
two arms and fold up seat

**Controls:** Constant pressure controls under arm  
and 2 wireless remote controls (infra-red)


### Safety Devices:

- Footrest obstruction sensors
- Swivel seat cut-off switch
- Slack cable brake
- Overspeed brake
- Final limit switch at top landing
- Seat belt

**Warranty:** Five years on drive train and two years  
on all component parts

### OPTIONAL EQUIPMENT

- Key switch on unit controls
- Manual folding track at lower landing

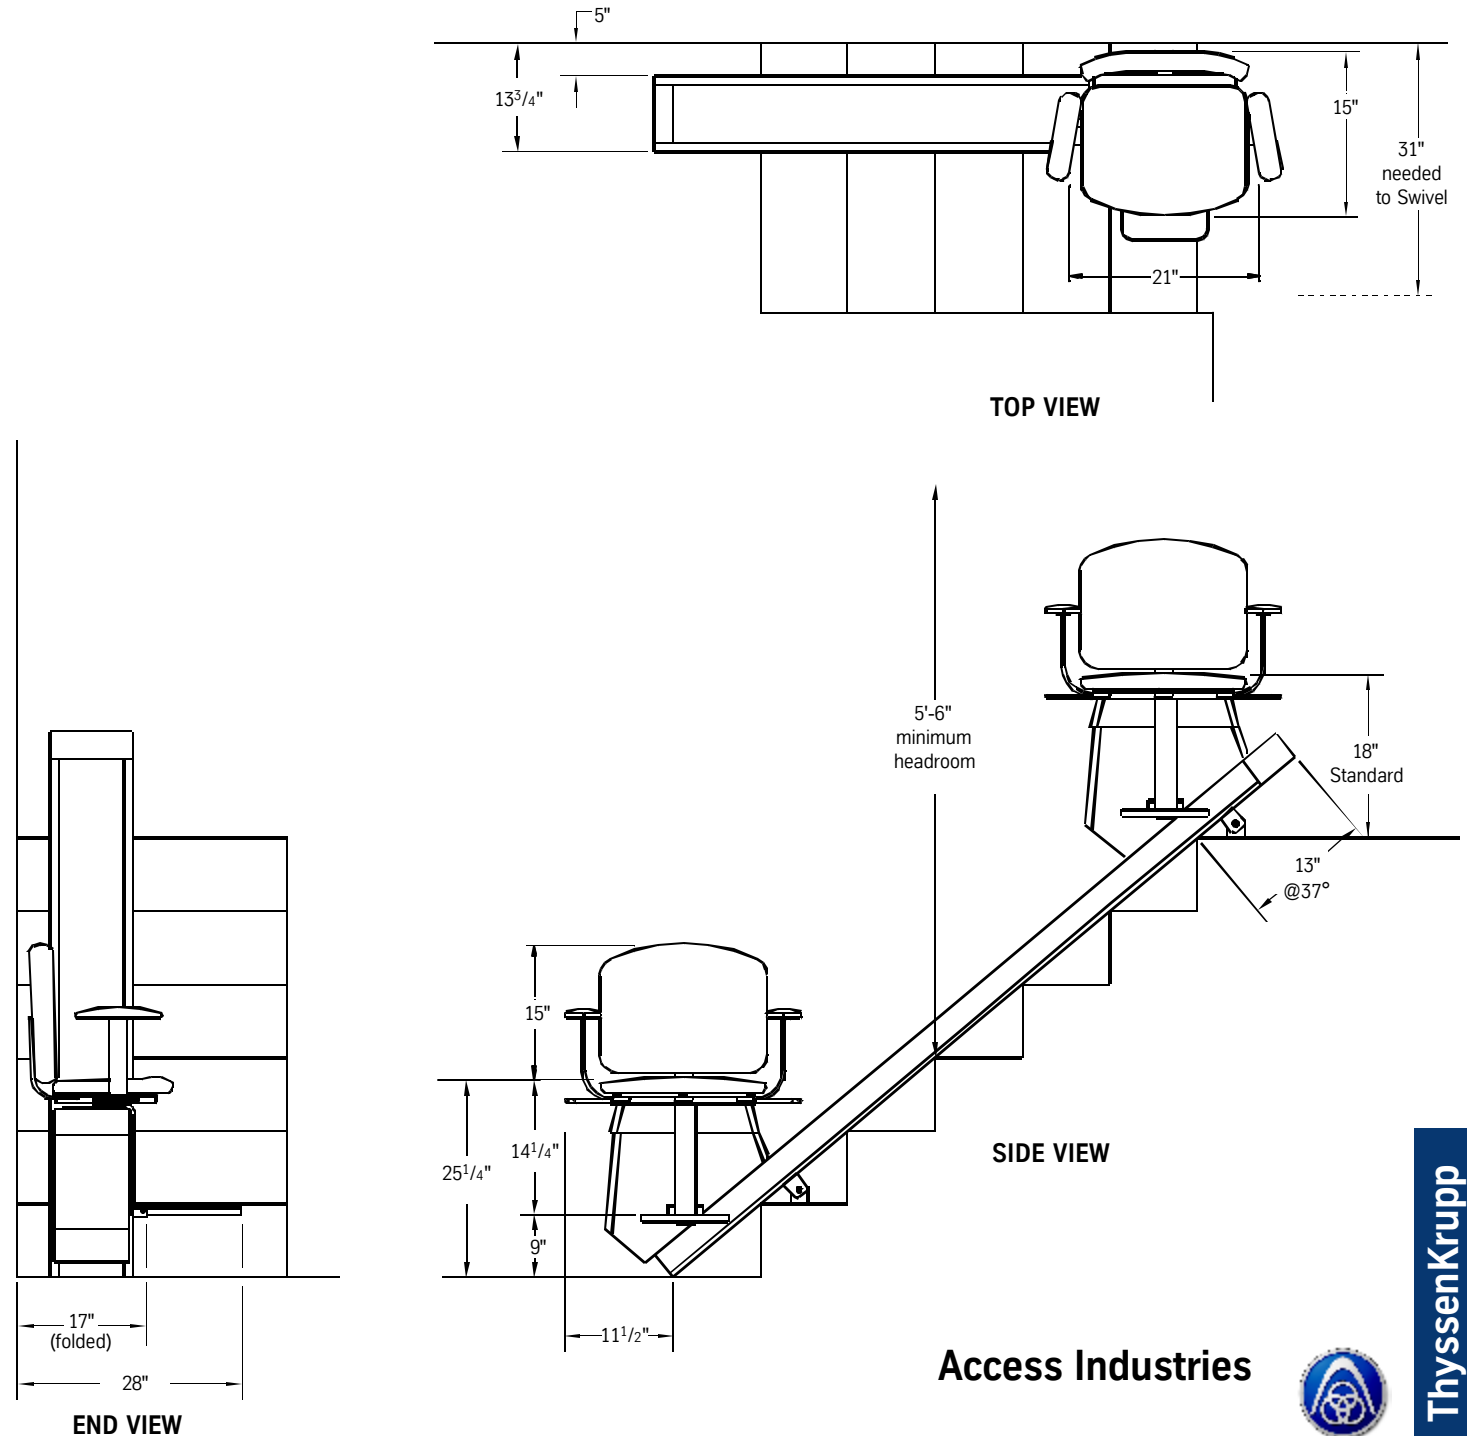

Access Industries



ThyssenKrupp